



CE RoHS



SBD-A timing of drainage solenoid valve

Use: Universal electronic drain valve in analog circuit solid match the solenoid valve, electronic timer implementation to the timing of condensed water from compressed air system auto emissions. Drying machine is widely used in filter separator gasholder dripping feet, compressed air system components, discharge time and interval time can be adjusted according to different needs

Characteristic:

- easy installation Automatic
- Time interval and discharge time can be adjusted with the test button
- Orifice size:3mm pressure:16bar
- Heat resistance level: H class Ip65
- Filter configuration ball valves, import and export into 90°C




Technology Parameters:

| TIMER | TIMER |
|-----------------------|-------------------------|
| Interval time (OFF) | 0.5~45min |
| Discharge time (ON) | 0.5 ~ 10sec |
| Voltage | 24 ~ 240V AC/DC 50/60HZ |
| Power | 22VA |
| Ambient temp | -10~+60°C |
| IP level | Ip65 |
| Shell material | ABS |
| Connect | DIN43650A |
| Indicator light | Electric light |

| Solenoid valve | SBD-A |
|------------------|-----------------------|
| Type | 2/2-Way direct acting |
| Pipe size | G1/4" 3/8" 1/2" |
| Working Pressure | 0-16bar |
| Fluid temp | < 80°C |
| Orifice size | 3mm |
| Body material | brass |
| Insulation level | H class |
| IP level | IP65 |
| Voltage range | ± 10% |

Configuration dimension chart

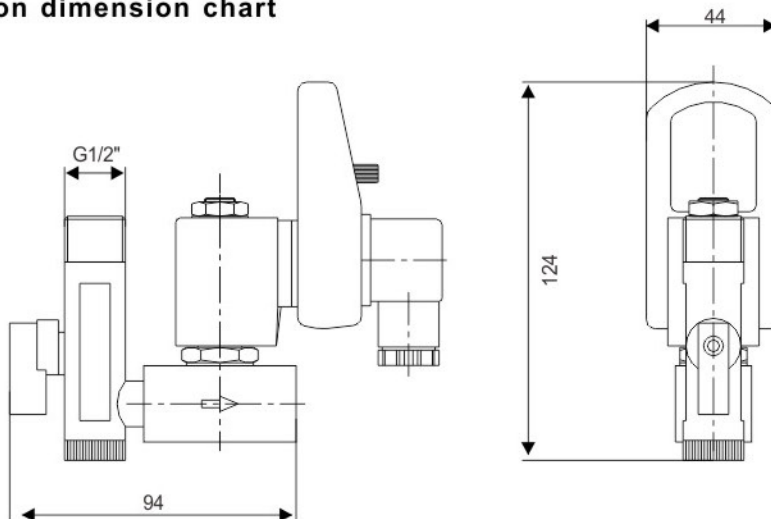

Sanlixin Solenoid Valve

SBD-B timing of drainage solenoid valve

Use: Universal electronic drain valve in analog circuit solid match the solenoid valve, electronic timer implementation to the timing of condensed water from compressed air system auto emissions. Drying machine is widely used in filter separator gasholder dripping feet, compressed air system components, discharge time and interval time can be adjusted according to different needs

Characteristic:

- easy installation Automatic
- Time interval and discharge time can be adjusted with the test button
- Orifice size:3mm pressure:16bar
- Heat resistance level: H class Ip65
- Filter configuration ball valves, import and export into 180°C



Technology Parameters:

| TIMER | TIMER |
|-----------------------|-------------------------|
| Interval time (OFF) | 0.5~45min |
| Discharge time (ON) | 0.5 ~ 10sec |
| Voltage | 24 ~ 240V AC/DC 50/60HZ |
| Power | 22VA |
| Ambient temp | -10~+60°C |
| IP level | Ip65 |
| Shell material | ABS |
| Connect | DIN43650A |
| Indicator light | Electric light |

| Solenoid valve | SBD-B |
|------------------|-----------------------|
| Type | 2/2-Way direct acting |
| Pipe size | G1/2" |
| Working Pressure | 0-16bar |
| Fluid temp | < 80°C |
| Orifice size | 3mm |
| Body material | brass |
| Insulation level | H class |
| IP level | IP65 |
| Voltage range | ± 10% |

Configuration dimension chart

